




Main features

- Temperature limits: - 200 ... + 600° C
- Tolerance: UNI 7937, IEC 751 standards:
 - ± 0.15° C at 0° C for class A (1/2 DIN)
 - ± 0.30° C at 0° C for class B (1 DIN)
 - ± 0.10° C at 0° C for class (1/3 DIN)
- Insulation: Mineral Oxide (MgO)
- PT100 wire-wound resistance thermometer
- Min. size: 100mm including connector

MODELS

TR7M A: without fitting

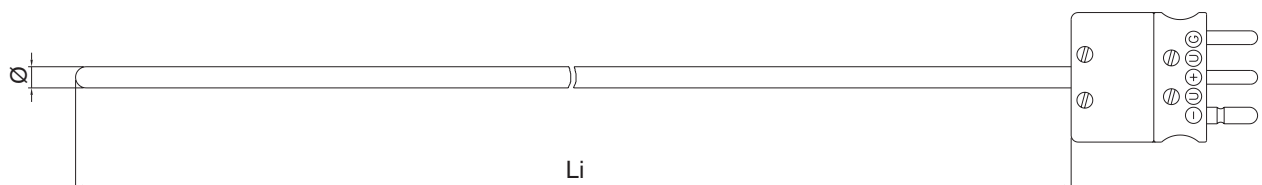

TR7M B: with adjustable compression fitting

